

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)


PCT

(10) International Publication Number
WO 2005/009618 A1

- (51) International Patent Classification⁷: **B01L 3/02**
- (21) International Application Number:
PCT/PL2004/000046
- (22) International Filing Date: 18 June 2004 (18.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
P 361430 24 July 2003 (24.07.2003) PL
- (71) Applicant (for all designated States except US): **PZ HTL SPOLKA AKCYJNA** [PL/PL]; ul. Daniszewska 4, PL-03-230 Warszawa (PL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KARBOWNICZEK, Jacek** [PL/PL]; ul. Panska 61 m. 43, PL-00-830 Warszawa (PL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EXCHANGEABLE PIPETTE TIP EJECTOR ASSEMBLY

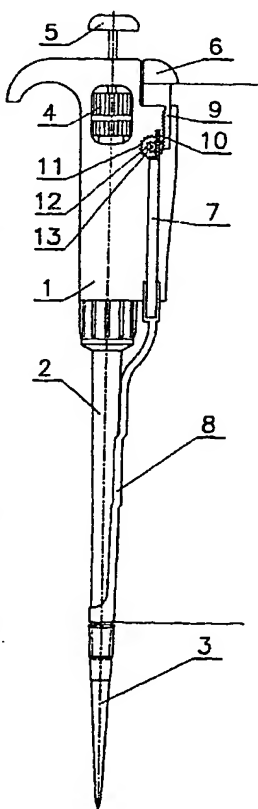

(57) Abstract: The exchangeable pipette tip assembly (3) is seated on the pipette body, and has the ejector push (6) linked to the ejector (3), while the ejector push button (6) has the push button toothed bar (9), and the ejector pusher (7) has the pusher toothed bar (10). Inside the pipette body the push button toothed wheel (11) is disposed, which is engaged with the push button toothed bar (9), and the pusher toothed wheel (12), which is engaged with the pusher toothed bar (10), while both toothed wheels (11, 12) are interconnected so that they make the same rotational movement around their common axis (13) of rotation rigidly fixed with respect to the handle (1).

WO 2005/009618 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.